



INDONESIAN JOURNAL ON GEOSCIENCE

Geological Agency
Ministry of Energy and Mineral Resources

Journal homepage: <http://ijog.geologi.esdm.go.id>
ISSN 2355-9314, e-ISSN 2355-9306



Probabilistic Resource Assessment of The Ulumbu Geothermal Field, East Nusa Tenggara, Indonesia

HERU BERIAN PRATAMA, IQBAL KURNIAWAN, and SUTOPO

Geothermal Engineering, Master Programme, Faculty of Mining and Petroleum Engineering, Institut Teknologi Bandung, Jln. Ganesha 10, Bandung 40132, Indonesia

Corresponding author: heru.berian@geothermal.itb.ac.id
Manuscript received: June, 2, 2021; revised: October, 1, 2021;
approved: December 9, 2021; available online: April, 20, 2022

Abstract - A resource assessment of the Ulumbu Geothermal Field, East Nusa Tenggara, Indonesia, is proposed here. The fundamental issue of reserve estimation is determining the optimum capacity to be installed (field size) that affects the decision-making in geothermal projects. The reservoir numerical model and heat stored method are the most appropriate tools for geothermal resource assessment. Therefore, the hybrid numerical simulation and heat stored methods, coupled with the probabilistic approach, are applied to Ulumbu. Based on the calibrated numerical model, the estimation of the reservoir is divided into the steam zone and liquid reservoir. The energy reserve of the Ulumbu is estimated by Monte Carlo simulation with the results P10-P50-P90 are 71 MWe, 95 MWe, and 127 MWe, respectively.

Keywords: Ulumbu, reservoir numerical model, heat stored, Monte Carlo, probabilistic resource assessment

© IJOG - 2022.

How to cite this article:

Pratama, H.B., Kurniawan, I., and Sutopo, 2022. Probabilistic Resource Assessment of The Ulumbu Geothermal Field, East Nusa Tenggara, Indonesia. *Indonesian Journal on Geoscience*, 9 (2), p.183-193. DOI: [10.17014/ijog.9.2.183-193](https://doi.org/10.17014/ijog.9.2.183-193)

INTRODUCTION

The Ulumbu geothermal field is located in Manggarai Regency, East Nusa Tenggara, Indonesia, as shown in Figure 1. It is owned by P.T. PLN (Persero) with a concession area around 10 km². The field has been producing electricity from four units, having a total capacity of 10 MWe. The Ulumbu power plant plans to increase the electricity production by adding two more units having a total capacity of 2×20 MW; then, further assessment of the reservoir needs to be carried out. An integrated reservoir study is needed to estimate the reservoir power generation capacity, to increase the understanding of the reservoir characteristics,

and to determine an optimum development scenario. The application of a numerical reservoir model in planning and managing a geothermal field has been a widespread practice as more than a hundred geothermal fields that have been modelled worldwide (O'Sullivan *et al.*, 2001).

The integrated reservoir studies using reservoir simulation had been carried out by several researchers, a greenfield and brownfield of geothermal fields. Several geothermal greenfield numerical modelling, not yet been developed for production, have been carried out, such as Atadei (Supijo *et al.*, 2019a, 2019b, 2018; Pratama *et al.*, 2020; Supijo *et al.*, 2020), Danau Ranau (Afiat *et al.*, 2021), Cisolok-Cisukarame (Sumartha *et al.*,

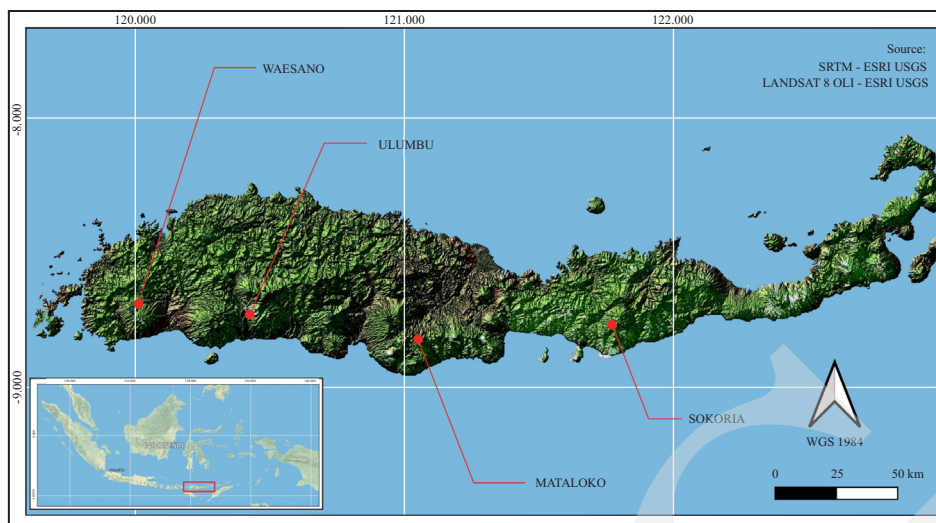


Figure 1. Location of Ulumbu geothermal field in Flores Island.

2020), Ungaran (Assiddiqy *et al.*, 2021), Songa-Wayaua (Hasbi *et al.*, 2020), and Arjuno-Welirang (Putra *et al.*, 2019). The greenfield numerical model provides a piece of useful information for consistency with the conceptual model. Reservoir numerical simulation, at the exploration state with limited data available, is unlikely to give a more realistic long-term production than more straightforward volumetric methods. However, it has a value at that stage, but this method might be the best for checking the consistency or update the conceptual model.

On the other side, several geothermal fields producing brownfield in Indonesia have been modelled, such as Sibayak (Atmojo *et al.*, 2001), Kamojang (Zuhro, 2004; Suryadarma *et al.*, 2010), Darajat (Alamsyah *et al.*, 2005; Hoang *et al.*, 2005), Lahendong (Koestono *et al.*, 2010), Wayang Windu (Mulyadi and Ashat, 2011), Dieng (Sirait *et al.*, 2015; Ashat *et al.*, 2019c), Awibengkok (Pasikki *et al.*, 2016), Muara Laboh (Situmorang *et al.*, 2016), Sarulla (Marjuwan *et al.*, 2016; Nizami *et al.*, 2016), Patuha (Firdaus *et al.*, 2016; Ashat *et al.*, 2018; Ashat and Pratama, 2018; 2019a, 2019b, 2019d; Pratama *et al.*, 2021), Karaha Telaga Bodas (Prabata *et al.*, 2017, 2019; Sutopo *et al.*, 2019), Ulumbu (Kurniawan *et al.*, 2017, 2018a, 2019), Sorik Marapi (Mulyani *et al.*, 2019), Mataloko (Pradhipta *et al.*, 2019; Jatmiko *et al.*, 2021), Tompaso (Lesmana

et al., 2019, 2021), Lumut Balai (Hamdani *et al.*, 2020). Reservoir simulation is the most applicable method for estimating reserves of geothermal fields. The output of numerical model could be used to estimate the Ulumbu geothermal reserves with heat stored method coupled with Monte Carlo simulation.

The process of building a numerical reservoir model for a project at the early exploitation stage is essential, and the estimation of the heat stored method could be useful (Sarmiento and Björnsson, 2007; Sarmiento and Steingrímsson, 2013). The numerical reservoir model could be used to decide an optimum development scenario for the Ulumbu geothermal field (Kurniawan *et al.*, 2017, 2018a, 2019). Therefore, this study aimed to estimate the energy reserve of the Ulumbu geothermal field using the heat stored method coupled with Monte Carlo simulation based on the output from a natural state calibration of the Ulumbu numerical model.

MATERIAL AND METHODS

Ulumbu Numerical Model

The Ulumbu conceptual models provide a full description of the structure and nature of the Ulumbu geothermal system. The models were built from integrated multidisciplinary geological,

geochemical, geophysical, and well data. Figure 2 shows the conceptual model of the field by using a slice plan NE–SW. It represents the components of a geothermal system such as reservoir, heat source, caprock, recharge and discharge areas.

The latest model by Kurniawan (Kurniawan *et al.*, 2019) was used in this study. The natural state model modified the model structure and increased the validation accuracy through better well temperature matching and better conceptual model representation. In this study, only temperature profiles were considered as no actual pressure profiles were available. Figure 3 indicates a good matching between the model temperature and the actual data.

The iso-temperature profile and steam cap zone above the deep liquid reservoir are shown in Figures 4 and 5. This reservoir type is similar to

several types of research in the two-phase geothermal field (Pratama and Saptadji, 2016, 2018, 2021; Prabata *et al.*, 2019; Hamdani *et al.*, 2020). The model temperature distribution and mass vector show a good correspondence with the conceptual model. The mass vectors also show the location of the upflow and outflow zones of the geothermal system. Conceptual model and natural state model, in terms of mass flow, show a good correlation, indicated by the direction of fluid flow and the location of upflow and outflow on the model. The upflow zone is between the Poco Rii depression and Poco Leok, while the outflow zone is towards the west. The fluid flow direction from the west towards the east reservoir area is indicated as the recharged area based on the numerical model. Therefore, the result of the Ulumbu numerical

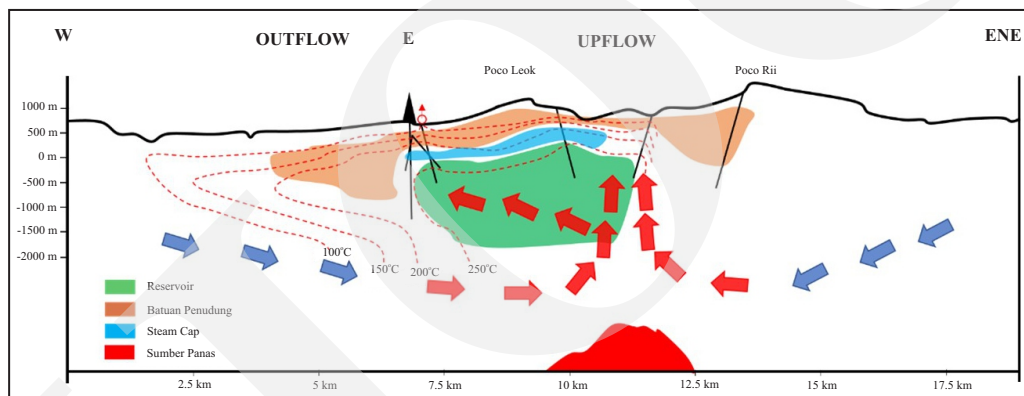


Figure 2. Conceptual model of the Ulumbu geothermal field (Kurniawan *et al.*, 2019).

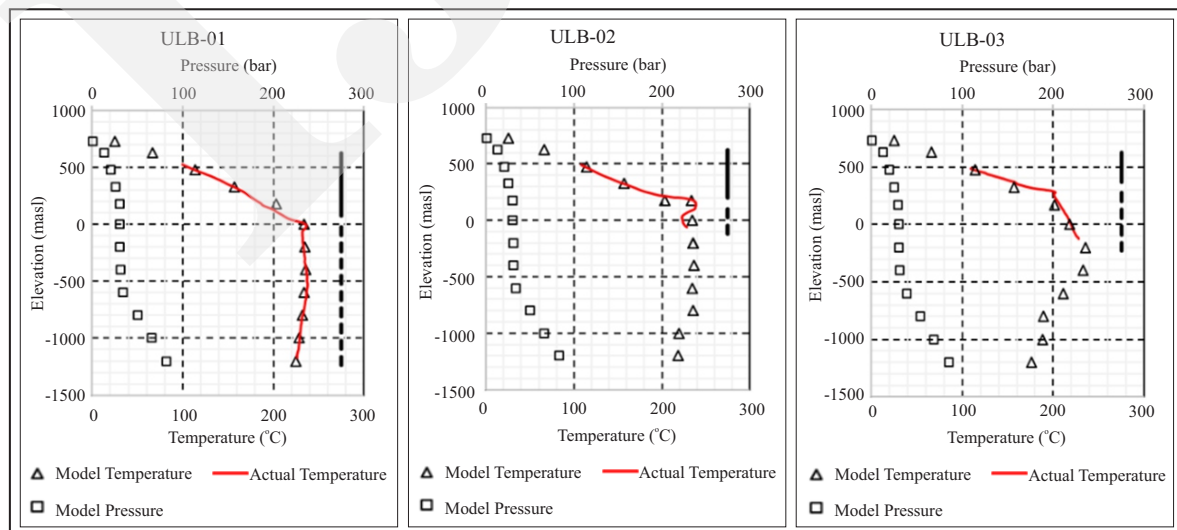


Figure 3. Pressure and temperature matching for ULB-01, ULB-02, and ULB-03 (Kurniawan *et al.*, 2019).

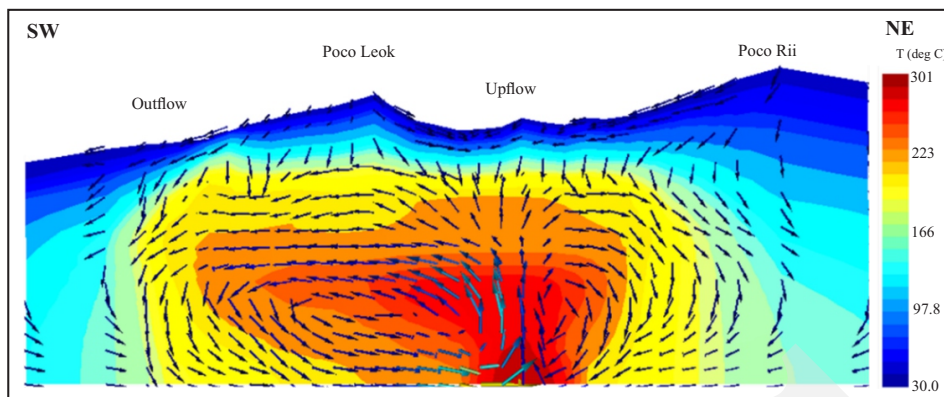


Figure 4. Heat-mass flow in the model agrees with the conceptual model of the Ulumbu field (Kurniawan *et al.*, 2019).

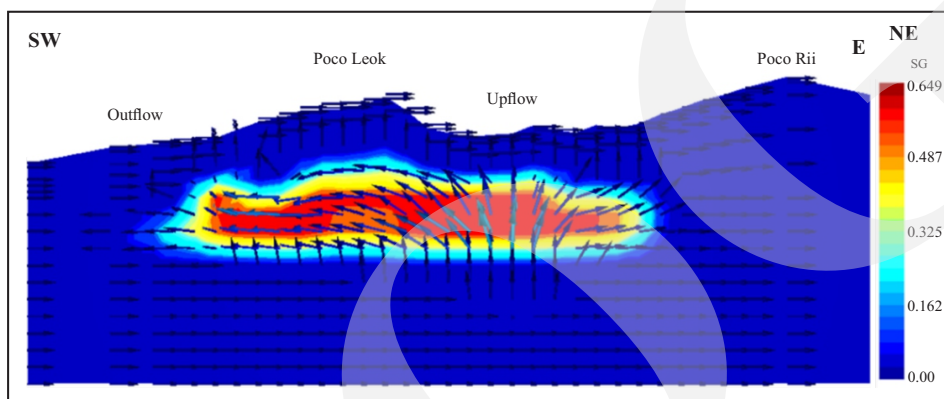


Figure 5. Steam flow at Ulumbu Geothermal Field, the cross-section of gas saturation (Kurniawan *et al.*, 2019).

simulation at the natural state model could be used to update the conceptual model.

The numerical model and heat stored are the most commonly applied methods in geothermal resource assessment. The heat stored method is considered the most practical approach but with uncertainties in the parameter inputs. There is no doubt that the reservoir numerical model is the best approach in estimating geothermal resources. Many researchers combined the natural state model with probabilistic heat stored calculation (Ashat *et al.*, 2019b; Hasbi *et al.*, 2020; Hidayat *et al.*, 2018; Kurniawan *et al.*, 2019; Pratama and Saptadji, 2021, 2018; Putra *et al.*, 2019). In Indonesia, the numerical model is mandatory to estimate the proven reserve based on SNI 6009 (2017) however, it is unclear how to calculate it. Therefore, this paper offers an approach of combining the output of numerical simulation at natural state model with heat stored method to estimate the Ulumbu geothermal reserves.

The estimated geothermal energy reserves were carried out using Monte Carlo simulation, an essential tool, with a range of values of the various reservoir parameters. This probabilistic approach was applied to evaluating reserves that capture uncertainty. The defining values of a reservoir input parameter, numbers within the distribution range, were selected based on the natural state model and attracted over a thousand iterations for each set of calculations. The heat stored method was carried out using a Monte Carlo simulation with 60,000 random numbers to generate a value of the parameters used in calculations. Generating random numbers in a computer programme is a requirement to using any of the Monte Carlo methods. The Ulumbu geothermal field has a steam zone and deep liquid reservoir. Then, Sarmiento and Steingrímsson (2007, 2013) state that hypothetically, it is wise to calculate the heat component from the deep liquid reservoir and the two phases (vapour-dominated zone) of the reservoir.

The parameters used, shown in Table 1, were derived from the study of geoscience data, drilling wells, and natural state models that had been built. The area was based on high temperature from the numerical model; thickness was based on the numerical model and ULB-01 well. The rock density was based on gravity data and SNI 6482:2018; the porosity was based on the numerical model, and SNI 6482:2018; rock heat capacity was based on Vosteen and Schellschmidt (2003) and SNI. Recovery factor was based on Muffler and Cataldi (1978) and SNI 6482:2018; electric efficiency was based on Bodvarsson (1974). The initial reservoir temperature was based on well temperature; the initial water saturation was based on a numerical model; the final water saturation was based on Ashat *et al.* (2019b). The economic life of the project is 30 years based on SNI 6482 (2018).

RESULTS

The estimation result of the Ulumbu using the heat stored method shows that the cumulative distribution used Monte Carlo simulation (Figure 6) and the probabilistic result of P10-P50-P90 are shown in Table 2. The probabilistic result of P10-P50-P90 in all steam, are 44 MWe, 60 MWe, and 81 MWe, respectively. In contrast with the probabilistic liquid, the reservoir is, consecutively, 27 MWe, 35 MWe, and 46 MWe.

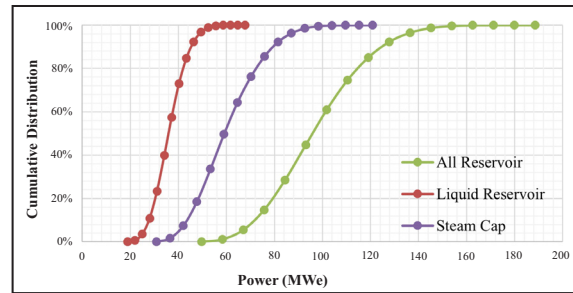


Figure 6. Cumulative probability of heat stored method.

Table 2. Heat Stored Calculation Results for Each Zone

Probability	Power (MWe)		
	Steam Cap	Liquid Reservoir	All Reservoir
P10	44	27	71
P50	60	35	95
P90	81	46	127

The liquid reservoir and steam zone calculation from the Ulumbu field shows that the steam zone is superior to the liquid reservoir. Overall, the reserve of the steam zone is almost double to the liquid reservoir. The probabilistic result of P10-P50-P90 in all steam are 71 MWe, 95 MWe, and 127 MWe, respectively. The calculation result shows that P50 is 95 MWe, close to the ESDM calculation result (2017) of 100 MWe. Because the reservoir area uses resistivity survey data (Magnetotellurics – MT) and The Ulumbu produced 4 x 2.5 MWe, calculated reserves fall into the category of probable reserves. Similar to SNI Standard, the reserve is categorized as probable because of the

Table 1. Input Parameter of Each Zone for Heat Stored Method

Parameters	Vapor			Liquid			Remarks
	Min	Max	Most	Min	Max	Most	
Area (km ²)	19.8	24.2	22	19.8	24.2	22	Model
Thickness (m)	400	1000	600	400	800	600	Model, ULB-01
Rock Density (kg/m ³)	2400	3000	2600	2400	3000	2600	Gravity, SNI
Porosity	0.07	0.1	0.08	0.05	0.08	0.07	Model, SNI
Rock Heat Capacity (kJ/kg)	0.95	1	0.985	0.95	1	0.985	(Vosteen and Schellschmidt, 2003), SNI
Recovery Factor	0.175	0.25	0.213	0.125	0.2	0.175	(Muffler and Cataldi, 1978), SNI
Electric Efficiency	0.11	0.112	0.111	0.105	0.11	0.108	(Bodvarsson, 1974)
Initial Reservoir Temperature (°C)	235	240	237	225	234	230	Well Temperature
Initial Water Saturation	0.3	0.35	0.325	0.65	0.7	0.675	Model
Final Water Saturation		0.05	0	0.3	0.5	0.4	(Ashat <i>et al.</i> , 2019b)

areal extent based on MT and indicative that the Ulumbu has high-temperature resources. This area is potential for well-targeting.

The heat stored method calculates the recoverable thermal energy for the specific volume, temperature, and exploitation time of the geothermal reservoir. Through the Monte Carlo simulation, the probabilistic approach of estimating geothermal reserves becomes less demanding. It is generally used and has been proven to be practical in estimating geothermal resources and reserves. The method is useful in estimating potential resources

to geothermal prospects during early exploration, where the available data is limited. The total theoretical thermal and electrical powers can be calculated from the thermal energy stored in rock and fluids. However, based on the SNI 6009:2017, the proven reserve should be estimated using numerical simulation. Therefore, in this study, the parameters used for the heat stored method are obtained from reservoir numerical simulations.

The results of sensitivity analysis for the calculation of the steam zone and liquid reservoir are shown in Figure 7. The results showing reservoir

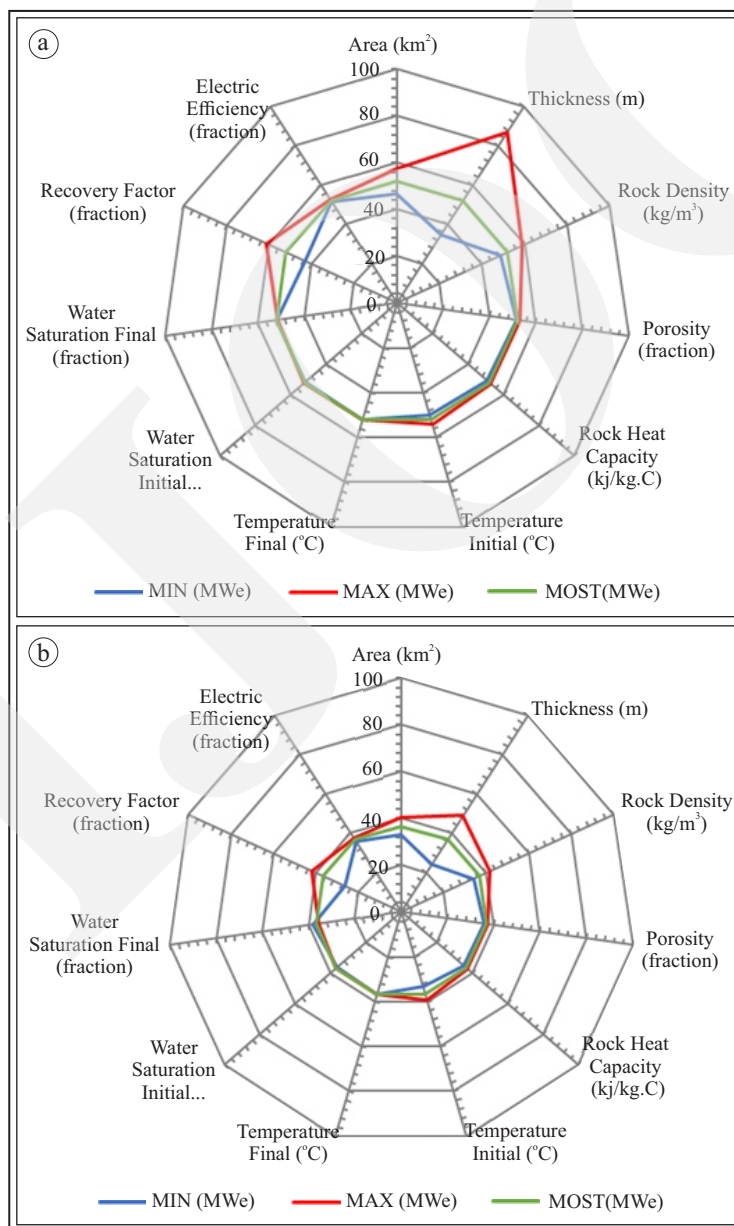


Figure 7. Sensitivity analysis of heat stored method: (a). steam zone and (b). liquid reservoir.

thickness and recovery factors are the most sensitive parameters for the steam zone and liquid reservoirs. Therefore, the determination of these parameters must be done carefully so as not to produce incorrect calculations.

The thickness is the most sensitive parameter in each steam zone and liquid reservoir. The vertical extent of the resource was delineated based on the fluid phase in the reservoir. The range of thickness in the steam zone is around 400 - 600 m contrasts with the liquid reservoir around 400 - 800 m. Nevertheless, both reservoirs have an identical, most likely thickness at 600 m.

Defining the portion of the geothermal energy that is practically recoverable at the wellhead (surface) is challenging. This factor makes the heat stored method be extremely uncertain and inaccurate. The recovery factor is dependent on the permeable reservoir and the heat sweep efficiency from these permeable channels. This parameter depends on the reservoir thermodynamic and hydraulic characteristics, such as reservoir area, temperature, permeability, porosity, and recharge.

CONCLUSIONS

The combination of reservoir numerical simulation and heat stored method with Monte Carlo simulation is suitable for estimating a probabilistic geothermal reserve. The geothermal resource assessment of the Ulumbu Geothermal field with a steam zone reservoir underlying liquid reservoir has been estimated using the combined methods. The calculation is divided into the steam zone and liquid reservoir with a total capacity of probabilistic P10-P50-P90, 71 MWe, 95 MWe, and 127 MWe, respectively. However, the critical issue of the heat stored method is an oversimplification of the actual geothermal reservoir. Therefore, to address this issue, the latest geothermal resource assessment methodology method is Experimental Design (ED) and Response Surface Methodology (RSM). Dynamic modelling could be applied to produce the heat and mass flow from the reservoir numerical model. The ED and RSM method

coupled with numerical reservoir modeling is a promising hybrid technique that is effective and efficient to be implemented in geothermal resource assessment.

ACKNOWLEDGEMENT

This research was supported by Geothermal Research Group, Faculty of Mining and Petroleum Engineering, Institut Teknologi Bandung. The authors also would like to thank anonymous reviewers and editors for the quality improvement of the article.

REFERENCES

- Afiat, Idianto, O., Rera, G.F., Wardoyo, G.K., Sutopo, Pratama, H.B., and Hamdani, M.R., 2021. Updated Conceptual Model and Resource Assessment using Numerical Reservoir Simulation of Danau Ranau Geothermal Field Indonesia, *Proceedings of World Geothermal Congress 2020+1*. p.1-11. DOI: 10.1088/1755-1315/732/1/012027
- Alamsyah, O., Bratakusuma, B., Hoang, V., and Roberts, J.W., 2005. *Dynamic Modeling of Darajat Field Using Numerical Simulation*.
- Ashat, A. and Pratama, H.B., 2018. Application of experimental design in geothermal resources assessment of Ciwidey-Patuha, West Java, Indonesia. *IOP Conference Series: Earth and Environmental Science* 103. DOI: 10.1088/1755-1315/103/1/012009
- Ashat, A., Pratama, H.B., and Itoi, R., 2019a. Updating conceptual model of Ciwidey-Patuha geothermal using dynamic numerical model. *IOP Conference Series: Earth and Environmental Science*, 254. DOI: 10.1088/1755-1315/254/1/012010
- Ashat, A., Pratama, H.B., and Itoi, R., 2019b. Comparison of resource assessment methods with numerical reservoir model between heat stored and experimental design: Case study Ciwidey-Patuha geothermal field.

- IOP Conference Series: Earth and Environmental Science*, 254. DOI: 10.1088/1755-1315/254/1/012011
- Ashat, A., Ridwan, R., Prabata, T., Situmorang, J., Adityawan, S., and Ibrahim, R., 2019c. Numerical Simulation Update of Dieng Geothermal Field, Central Java, Indonesia. *Proceeding of 41st New Zealand Geothermal Workshop 2019*.
- Ashat, A., Ridwan, R.H., Judawisastra, L.H., Situmorang, J., Elfajrie, I., Atmaja, R.W., Iskandar, C., and Ibrahim, R.F.I., 2019d. Conceptual Model and Numerical Simulation Update of Patuha Geothermal Field, West Java, Indonesia Conceptual Model and Numerical Simulation Update of Patuha. *Proceedings of 41st New Zealand Geothermal Workshop, Auckland, New Zealand*.
- Ashat, A., Saptadji, N.M., Prabata, W., Pratama, H.B., and Itoi, R., 2018. Grid Block Remodeling of Ciwidey - Patuha Geothermal Numerical Simulation. *Grand Renewable Energy 2018, Proceedings*.
- Assiddiqy, M.H., Jatmiko, B.W., Ediatmaja, P., Prabowo, R., Sutopo, Pratama, H.B., and Hamdani, M.R., 2021. Numerical Simulation of a Vapor Core Geothermal System, Ungaran Geothermal Field, Indonesia. *Proceedings of World Geothermal Congress 2020+1. Reykjavik, Iceland*, p.1-12.
- Atmojo, J.P., Itoi, R., Fukuda, M., Tanaka, T., Daud, Y., and Sudarman, S., 2001. Numerical Modeling Study of Sibayak Geothermal Reservoir, North Sumatra, Indonesia. *Proceedings, Twenty-Sixth Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford, California*.
- Bodvarsson, G., 1974. Geothermal resource energetics. *Geothermics*, 3, p.83-92. DOI: 10.1016/0375-6505(74)90001-7
- Firdaus, F., Sutopo, and Pratama, H.B., 2016. The Natural State Numerical Model of Patuha Geothermal Reservoir, Indonesia. *The 4th Indonesia International Geothermal Convention & Exhibition 2016, Proceedings*, p.1-13.
- Hamdani, M.R., Pratama, and H.B., Sutopo, 2020. Updating the Conceptual Model of Lumut Balai Geothermal Field, South Sumatra, Indonesia Using Numerical Simulation. *IOP Conference Series: Earth and Environmental Science*, 417. DOI: 10.1088/1755-1315/417/1/012023
- Hasbi, H.G.F., Hamdani, M.R., Prasetyo, A.B.T., Khrisna, A.R., Lampuasa, M.J., Sutopo, Pratama, H.B., and Prabata, T.W., 2020. Application of Numerical Simulation to Update Conceptual Model and Resource Assessment of Songa-Wayaua Geothermal Field. *IOP Conference Series: Earth and Environmental Science*, 417. DOI: 10.1088/1755-1315/417/1/012014
- Hidayat, I., Sutopo, and Pratama, H.B., 2018. Probabilistic approach of resource assessment in Kerinci geothermal field using numerical simulation coupling with monte carlo simulation. *IOP Conference Series: Earth and Environmental Science*, 103. DOI: 10.1088/1755-1315/103/1/012007
- Hoang, V., Alamsyah, O., and Roberts, J., 2005. Darajat Geothermal Field Expansion Performance - A Probabilistic Forecast. *Proceedings of World Geothermal Congress*, p.24-29.
- Jatmiko, B.W., Pratama, H.B., and Sutopo, 2021. Updated Numerical Model of Mataloko Geothermal Field. *IOP Conference Series: Earth and Environmental Science*, 732. DOI: 10.1088/1755-1315/732/1/012024
- Koestono, H., Siahaan, E.E., Silaban, M., and Franzson, H., 2010. Geothermal Model of the Lahendong Geothermal Field, Indonesia. *Proceedings of World Geothermal Congress, Bali, Indonesia*, p.25-29.
- Kurniawan, I., Sutopo, Pratama, H.B., and Berian Pratama, H., 2017. A Natural State Modeling of Ulumbu Geothermal Field, East Nusa Tenggara, Indonesia. *Proceedings of 39th New Zealand Geothermal Workshop*. DOI: 10.1088/1755-1315/254/1/012027
- Kurniawan, I., Sutopo, S., Berian Pratama, H., and Adiprana, R., 2018a. An Improved Natural State Model of Ulumbu Geothermal Field, East Nusa Tenggara, Indonesia, in: *Grand Renewable Energy 2018. Proceedings, Pacifico Yokohama, Japan*.

- Kurniawan, I., Sutopo, S., Pratama, H.B., and Adiprana, R., 2019. A natural state model and resource assessment of Ulumbu Geothermal field. *IOP Conference Series: Earth and Environmental Science*, 254. DOI: 10.1088/1755-1315/254/1/012017
- Kurniawan, I., Sutopo, S., Pratama, H.B., Berian Pratama, H., and Adiprana, R., 2018b. An Improved Natural State Model of Ulumbu Geothermal Field, East Nusa Tenggara, Indonesia, *Grand Renewable Energy 2018, Proceedings*.
- Lesmana, A., Pratama, H.B., Ashat, A., and Saptadji, N.M., 2021. Sustainability of geothermal development strategy using a numerical reservoir modeling: A case study of Tompaso geothermal field. *Geothermics*, 96, 102170. DOI: 10.1016/j.geothermics.2021.102170
- Lesmana, A., Pratama, H.B., Ashat, A., Saptadji, N.M., and Gunawan, F., 2019. An Updated Conceptual Model of the Tompaso Geothermal Field Using Numerical Simulation, *Proceedings of 41st New Zealand Geothermal Workshop, Auckland, New Zealand*, 8pp. DOI:10.1016/j.geothermics.2021.102170
- Marjuwan, O.D., Sutopo, and Pratama, H.B., 2016. A Natural State Reservoir Modelling of Silangkitang Geothermal Field in North Sumatra Using TOUGH-2 Simulator A Natural State Reservoir Modelling of Silangkitang Geothermal Field in North Sumatra Using TOUGH-2 Simulator. *The 4th Indonesia International Geothermal Convention & Exhibition 2016, Proceedings*.
- Muffler, P. and Cataldi, R., 1978. Methods for Regional Assessment Resources of Geothermal. *Geothermics* 7, p.53-89. DOI:10.1016/0375-6505(78)90002-0
- Mulyadi and Ashat, A., 2011. Reservoir Modeling of the Northern Vapor-Dominated Two-Phase Zone of the Wayang Windu Geothermal Field, Java, Indonesia. *Proceedings of 36th Stanford Geothermal Workshop*, p.1-7.
- Mulyani, S., Sarmiento, Z., Chandra, V., Hendry, R., Nasution, S., Hidayat, R., Jhonny, J., Sari, P., and Juandi, D., 2019. Calibrated natural state model in sorik marapi geothermal field, Indonesia. *International Petroleum Technology Conference, IPTC 2019*. DOI: 10.2523/iptc-19221-ms
- Nizami, M., Sutopo, and Heru, 2016. Numerical Modelling of Namora-I-Langit Geothermal System, Sarulla, Indonesia. *The 4th Indonesia International Geothermal Convention & Exhibition 2016, Proceedings*.
- O'Sullivan, M.J., Pruess, K., and Lippmann, M.J., 2001. State of the art geothermal reservoir simulation. *Geothermics*, 30, p.395-429. DOI: 10.1016/S0375-6505(01)00005-0
- Pasikki, R., Cita, F., and Hernawan, A., 2016. Application of experimental design (ED) in geothermal greenfield size assessment. *Proceedings, The 4th Indonesia International Geothermal Convention & Exhibition, Proceedings*.
- Prabata, W., Sutopo, and Berian, H., 2017. 3D Natural State Model of Karaha-Talaga Bodas Geothermal Field, West Java, Indonesia, *Proceedings of 39th New Zealand Geothermal Workshop*.
- Prabata, W., Sutopo, S., and Pratama, H.B., 2019. Experimental design and response surface method application in resources assessment: Case study Karaha-Talaga bodas, West Java, Indonesia. *IOP Conference Series: Earth and Environmental Science*, 254. DOI: 10.1088/1755-1315/254/1/012026
- Pradhipta, Y.D., Sutopo, S., Pratama, H.B., and Adiprana, R., 2019. Natural state modeling of Mataloko Geothermal field, Flores Island, East Nusa Tenggara, Indonesia using TOUGH2 simulator. *IOP Conference Series: Earth and Environmental Science*, 254. DOI: 10.1088/1755-1315/254/1/012027
- Pratama, H.B. and Saptadji, N.M., 2021. Study of Production-Injection Strategies for Sustainable Production in Geothermal Reservoir Two-Phase by Numerical Simulation. *Indonesian Journal on Geoscience*, 18, p.25-38. DOI: 10.17014/ijog.8.1.25-38
- Pratama, H.B. and Saptadji, N.M., 2018. Study of sustainable production in two-phase liq-

- uid dominated with steam cap underlying brine reservoir by numerical simulation. *IOP Conference Series: Earth and Environmental Science*, 103. DOI: 10.1088/1755-1315/103/1/012005
- Pratama, H.B. and Saptadji, N.M., 2016. Numerical Simulation for Natural State of Two-Phase Liquid Dominated Geothermal Reservoir with Steam Cap Underlying Brine Reservoir. *IOP Conference Series: Earth and Environmental Science*, 42. DOI: 10.1088/1755-1315/42/1/012006
- Pratama, H.B., Supijo, M.C., and Sutopo, 2020. Experimental design and response surface method in geothermal energy: A comprehensive study in probabilistic resource assessment. *Geothermics*, 87, 101869. DOI: 10.1016/j.geothermics.2020.101869
- Pratama, H.B., Sutopo, Widiatmo, J.S., and Ashat, A., 2021. Numerical Investigative Modeling of Changes Within the Patuha Geothermal Reservoir and Its Production Sustainability Under Two Different Conversion Technologies. *Natural Resources Research*, 30, p.2969-2987. DOI: 10.1007/s11053-020-09748-7
- Putra, R.P.M., Sutopo, and Pratama, H.B., 2019. Improved natural state simulation of Arjuno-Welirang Geothermal field, East Java, Indonesia. *IOP Conference Series: Earth and Environmental Science*, 254. DOI: 10.1088/1755-1315/254/1/012022
- Sarmiento, Z.F. and Björnsson, G., 2007. Geothermal Resources Assessment – Volumetric Reserves Estimation and Numerical Modelling. *Resource Assessment and Environmental Management. UNU-GTP and LaGeo*, p. 1–13.
- Sarmiento, Z.F. and Steingrímsson, B., 2013. Volumetric resource assessment. *Short Course V on Conceptual Modelling of Geothermal Systems UNU-GTP*, p.1-15.
- Sarmiento, Z.F., Steingrímsson, B., 2007. Computer Programme for Resource Assessment and risk evaluation using Monte Carlo simulation. *Short course on Geothermal Development in Central America, Resource Assessment and Environmental Management*.
- Sirait, P., Ridwan, R.H., and Battistelli, A., 2015. Reservoir Modeling for Development Capacity of Dieng Geothermal Field , Indonesia. *Proceedings, 40th Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford, California*.
- Situmorang, J., Martikno, R., Putra, A.P., and Ganefianto, N., 2016. A Reservoir Simulation of the Muara Laboh Field , Indonesia. *Proceedings, 41st Workshop on Geothermal Reservoir Engineering Stanford University, Stanford, California*. SGP-TR-209, p.1-12.
- SNI 6009, 2017. *Klasifikasi sumber daya dan cadangan energi panas bumi Indonesia*.
- SNI 6482, 2018. *Parameter dalam estimasi potensi energi panas bumi*.
- Sumartha, A.G.A., Kurniawan, I., Wiradinata, R., Nandaliarasyad, N., Sutopo, Pratama, H.B., and Prabata, T.W., 2020. Updating the Conceptual Model of Cisolok-Cisukarame Geothermal field, West Java, Indonesia. *IOP Conference Series: Earth and Environmental Science*, 417. DOI: 10.1088/1755-1315/417/1/012025
- Supijo, M.C., Pratama, H.B., and Sutopo, 2020. Response Surface Method Using Box-Behnken Design for Probabilistic Resource Assessment: A Case Study in Atadei Geothermal Field, Indonesia. *IOP Conference Series: Earth and Environmental Science*. DOI: 10.1088/1755-1315/417/1/012022
- Supijo, M.C., Pratama, H.B., and Sutopo, 2019a. the Application of Experimental Design Using Three-Level Full Factorial Design for Probabilistic Resource Assessment in Atadei Geothermal Field, Indonesia 4 Publications 4 Citations See Profile. *The 7th Indonesia - International Geothermal Convention & Exhibition (IIGCE) 2019, Proceedings*.
- Supijo, M.C., Pratama, H.B., and Sutopo, 2019b. the Application of Experimental Design Using Three-Level Full Factorial Design for Probabilistic Resource Assessment in Atadei Geothermal Field, Indonesia 4 Publications 4 Citations See Profile. *The 7th Indonesia International Geothermal Convention & Exhibition (IIGCE) 2019, Proceedings*.

- Supijo, M.C., Wahjono, A.D., Lesmana, A., Harahap, A.H., Sutopo, Pratama, H.B., and Prabata, T.W., 2018. Updating Conceptual Model Using Numerical Modelling for Geothermal Green Field Prospect Area in Atadei , East Nusa Tenggara, Indonesia. *The 6th Indonesia International Geothermal Convention & Exhibition (IIGCE) 2018, Proceedings*.
- Suryadarma, Dwikorianto, T., Zuhro, A.A., and Yani, A., 2010. Sustainable development of the Kamojang geothermal field. *Geothermics*, 39, p.391-399. DOI: 10.1016/j. geothermics.2010.09.006
- Sutopo, Prabata, W., and Pratama, H.B., 2019. The development study of Karaha–Talaga Bodas geothermal field using numerical simulation. *Geothermal Energy*, 7. DOI: 10.1186/s40517-019-0139-2.
- Vosteen, H.D. and Schellschmidt, R., 2003. Influence of temperature on thermal conductivity, thermal capacity and thermal diffusivity for different types of rock. *Physics and Chemistry of the Earth*, 28, p.499-509. DOI: 10.1016/S1474-7065(03)00069-X
- Zuhro, A.A., 2004. *Numerical Modelling of the Kamojang Geothermal System, Indonesia. Geothermal Training Programme*, 34.